

## MULTI-PURPOSE Series

2 way passive loudspeaker system

### Audio-Performance MP15

The MP15 is a compact two-way passive system that employs a single AP-15" low frequency driver mounted in a B-6 type vented enclosure. The high frequency unit is a one inch ferro fluid cooled driver coupled to a 40° / 90°x 60° AP asymmetrical horn. The system incorporates a low loss passive filter designed for flat frequency response and optimal phase alignment.

The cabinet is constructed of high quality 18 & 22mm plywood and finished with black epoxy paint. The front steel grill can be removed without any tools. Simply remove the foam cover and put the grill out of its sleeves by putting your finger in the holes. To rotate the horn, simply remove the bolts and put it in one of the four positions. Note that the horn carries a sticker showing the FOH and stage monitor position.

The MP15 comes with a 35mm tube adapter, two recessed L-track flying points on the side of the loudspeaker and two single flying points at the back of the cabinet for aiming.

Its multi-angle design allows you to use the MP15 in a variety of applications. By rotating the asymmetrical horn, the MP15 can be configured as front of house or as stage monitor system.

The MP15 and SUB's work together with the MP15-CT or ALC48 controller as a system. The single rack-unit, dual channel controller provides all the basic functions to get the maximum performance from the system. Though the MP15 are passively filtered loudspeakers, the MP15-CT controller provides active protection for each individual driver offering maximum clarity of the music program, even at very high levels

## IDEAL FOR

Front of house  
or  
Stage monitor  
system

Touring  
Concert halls  
Clubs  
Discotheques  
Theatres



## Special Features

Asymmetrical horn

High efficiency

Low distortion


Processor controlled

MULTI-PURPOSE Series

MP15 Specifications


**Acoustical**

<b>Frequency response (1)</b>	50-20'000 Hz ± 3dB
<b>Max. peak SPL (2)</b>	138dB
<b>Coverage</b>	40°/90° by 60° (4 positions)
<b>Crossover frequency (3)</b>	1100Hz
<b>Power handling</b>	900W (AES) (4)

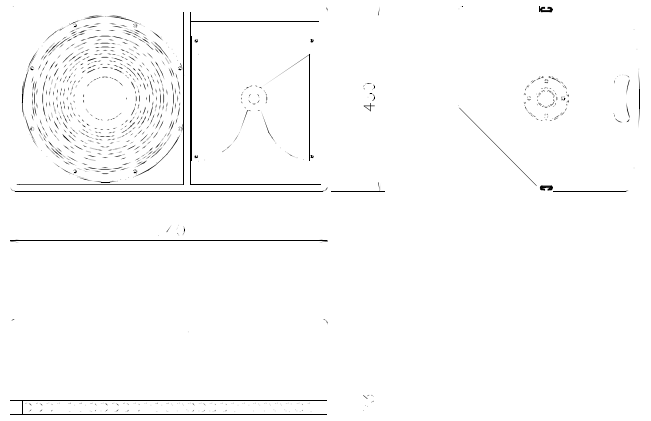


**Transducers and electrical**

<b>Low frequency</b>	15 inch, long excursion, low distortion cone driver
<b>High frequency</b>	2 inch diaphragm compression driver, loaded with asymmetrical horn
<b>Nominal impedance</b>	8 ohms
<b>Connectors</b>	2 x Neutrik Speakon, model NL4MP (wired in parallel) 1+: SP+, 1-: SP-, 2+, 2-: link




The coverage pattern of the asymmetrical horn.  
Vertically 60° and horizontally smoothly changing from 90° to 40°

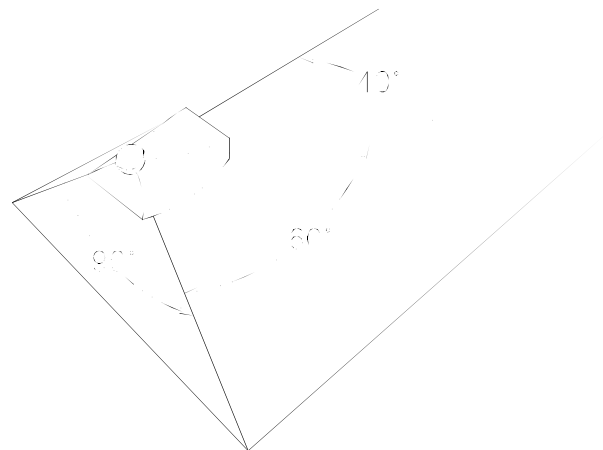

**Mechanical**

<b>Cabinet shape</b>	multipurpose FOH or floor monitor
<b>Cabinet size (W x H x D)</b>	740 x 430 x 423mm
<b>Cabinet, finish</b>	18 & 22mm plywood, black textured
<b>Mounting system</b>	one 35mm K&M tube stand adapter
<b>Rigging</b>	aircraft L-track fittings, sides and back
<b>Protective grill</b>	removable perforated steel grill covered with charcoal grey foam.
<b>Weight</b>	31 kg



**Low Profil  
Stage Monitor**