

TOURING Series

High power compact subwoofer system

Audio-Performance Touring SUB3

The SUB3 is a high power compact subwoofer cabinet designed to extend the frequency range and power bandwidth of Audio Performance full-range loudspeaker systems.

With a cut-off frequency of 32Hz, the SUB3 is made for applications where the reproduction of sub frequencies is of importance (music, sound effects). It consists of two long excursion 15-inch cone drivers mounted in a heavily braced vented enclosure capable of accommodating up to 1000W of power continuously.

It operates as a complete system with the P214, P214D or P216D controller.


When stacking several cabinets is necessary, the direct radiating loading of the SUB3 provides the optimal use of the coupling effect to increase the low end sensitivity of a system.

The enclosure is black epoxy painted. The front is protected by a heavy duty metal grill covered with charcoal grey foam.

IDEAL FOR

Touring
Concert halls
Discotheques
Sound effects

The SUB3 subwoofer system is ideal for any professional application requiring accurate low frequency reinforcement at high sound pressure levels.

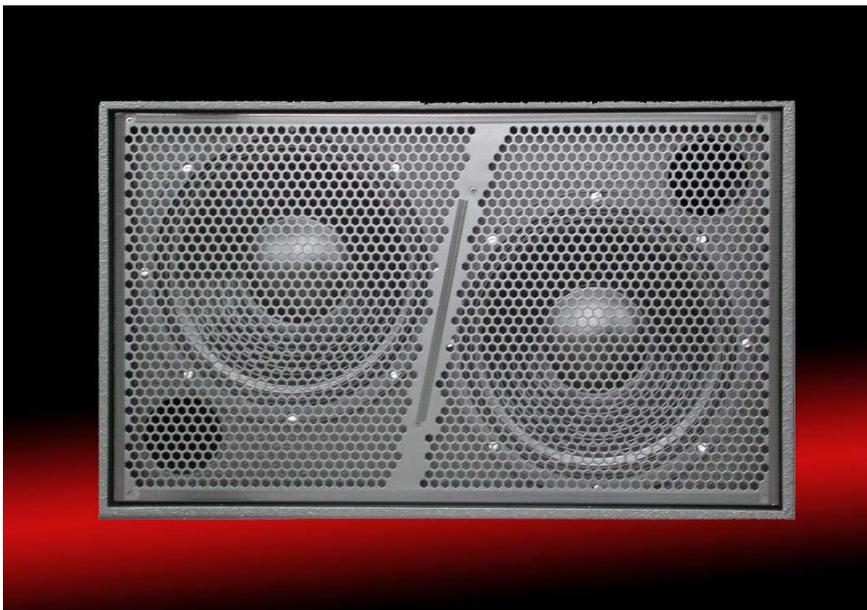

Special Features

high power handling

32Hz cut-off frequency

processor controlled

optimal LF coupling

TOURING series

Touring SUB3 Specifications

Acoustical with controller

frequency response (1)
 32 - 150 Hz

power handling
 2 x 500W (AES) (4)

max. peak SPL (2)
 133 dB

crossover frequency to full range system
 120Hz

Transducers and electrical

transducer complement
 2 x 15" long excursion cone drivers, ferrofluid cooled

connectors
 1 x Neutrik Speakon, model NL4MP
 1+: DRV1 + 1-: DRV1 -
 2+: DRV2 + 2-: DRV2 -

system nominal impedance
 2 x 8 Ohms

Mechanical

cabinet shape
 rectangular

cabinet size (W x H x D)
 870 x 536 x 536 mm

finish
 black epoxy painted
 front metal grill covered with charcoal grey foam

weight
 52.5 kg

