

LINE ARRAY Series

Compact Full Range Line Array System

Audio Performance Drive Line, DRL12 & DRL6



IDEAL FOR

Houses of worship
Large halls
Conferences

Combine high style
with tremendous
sound

For the first time, Drive Line elevates the art of sound to compliment any interior, from contemporary to classic, modern to traditional. Drive Line's stylish wood fuselage, finish options, and slim form factor, combined with exacting internal loudspeaker technology, means the perfect marriage of European style and sound. Drive Line's flexible, modular design allows a variety of configurations and placement options, including floor standing, on-wall and other custom applications. Drive Line is available in two different sizes, the DRL06 in 50cm, and the DRL12 in 100cm.

Drive Line's special DDT (Dynamic Drive Transducer) technology creates real cylindrical wave radiation across a wide frequency range. Reflections from ceiling and floor are minimized, and performance in large or small environments is maximized. Drive Line delivers superb acoustic output, exceptional acoustical performance and speech intelligibility. A choice of subwoofers and system controllers complete the fullrange Drive Line system. Drive Line comes finished in black, white, or in any RAL colors. Optional stands and other accessories allow endless installation possibilities. Regardless of installation

method, Drive Line bridges the gap between fine sound and fine art. Drive Line systems finally combine architectural and acoustical design goals, and unite the eye and ear in a new aesthetic.


LINE ARRAY Series

Specifications	DRL12	DRL6
ACOUSTICAL		
Frequency response (1)	100Hz - 18'000Hz + / - 3dB	100Hz - 18'000Hz + / - 3dB
Maximum peak SPL (2)	126dB	123dB
Coverage	Vertical: 14° Horizontal: 100°	Vertical: 18° Horizontal: 100°
Power handling.....	240W (AES) (4)	120W (AES) (4)
TRANSDUCERS		
Full Range	12 x 3.5" inch, ferrofluid cooled, long excursion, low distortion	6 x 3.5" inch, ferrofluid cooled, long excursion, low distortion
System nominal impedance	10 Ohms	12 Ohms
Connector	Phoenix 4 poles 2x SPEAKON NL4MP (optional)	Phoenix 4 poles 2x SPEAKON NL4MP (optional)
MECHANICAL		
Finish	Black or white epoxy painted or any other custom color	Black or white epoxy painted or any other custom color
Dimensions (W x H x D)	110 x 1111 x 116mm	110 x 565 x 116mm
Grill	1,2mm steel, foam cover	1,2mm steel, foam cover
Weight	12Kg	8Kg
Rigging	Wall or Speaker stand adaptor	Wall or Speaker stand adaptor

ACCESSORIES

Subwoofers: SUB112 / SUB112-amp / SUB28-Pro / SPEAKON Adaptor

References

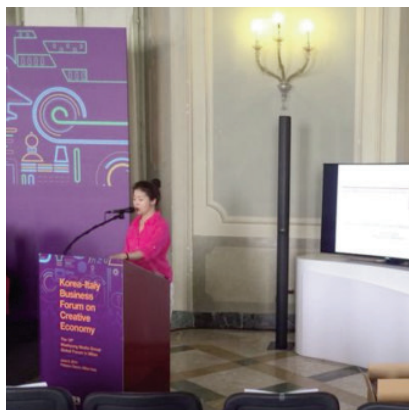

Korean-Italian Business Forum on creative Economy (DRL12 black)



TV show "The Voice" in Italy on Rai2 channel (DRL12 black)



Calvenzano church (DRL12 white)

(1) Frequency response: +/- 3dB, measured at 3 meters, on axis, half-space conditions - MLSSA 1/3 octave

(2) Max peak SPL: Measured with music referred to 1 meter

(3) Crossover: Acoustical crossover frequency - at these frequency, transducers produce equal sound pressure level

(4) AES: Power handling is measured under AES standard conditions